


Installing the Strap System

Note: Orientation of carabineer clip and strap. Strap cam (locking unit) **MUST** be in this location for proper pull on rack relative to the truck. **DO NOT** over tighten. It just needs to be snug.

- Step 1: Secure carabineer to existing truck cargo loop
- Step 2: Position bike rack toward front on bed (as shown)
- Step 3: Attach strap 'S' hook to front loop on rack
- Step 4: Clip strap to carabineer (as shown)
- Step 5: Attach strap "S" hook to rear loop on rack
- Step 6: Pull strap at cam until strap system is snug. (**do not over tighten**)

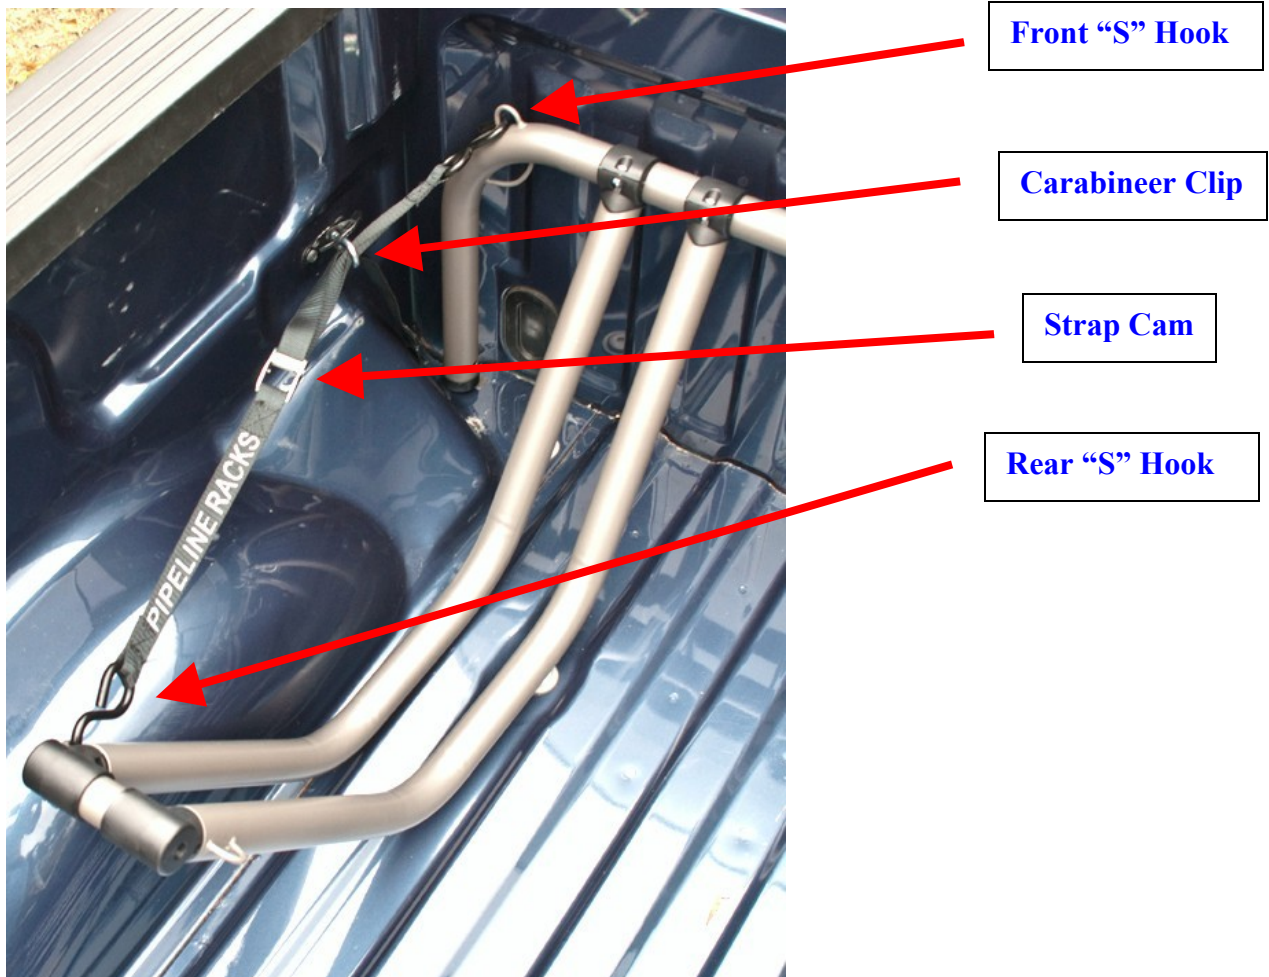

Note: The long thin loop under the left side of the rack is for the safety cable and lock (not supplied). When rack is in the bed of the truck with or without bikes you should **ALWAYS** have racks securely locked to truck.